

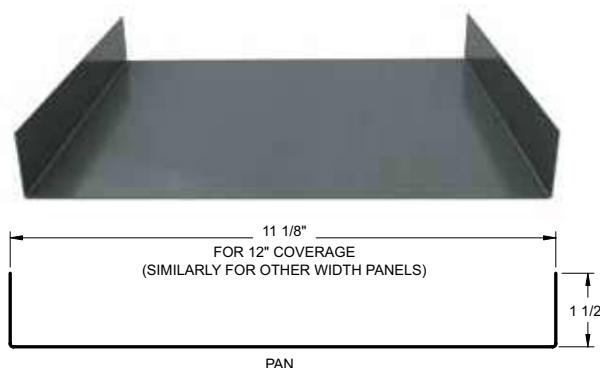
FABRAL® **SNAP-ON-BATTEN****BRIEF PRODUCT SPECIFICATION****FABRAL**  
CORE™**You challenge us.  
And we like it.**

Your vision for a building and what you want to achieve makes us think harder. It'd be easy to say - That won't work. Instead we go with - Let's see what we can do.

**Fabral.com**  
800.884.4484

**STANDING SEAM ROOF PANEL  
SNAP-ON-BATTEN**

Snap-On-Batten, a classic wide batten design combines bold, aesthetic design and high performance. Panels are ideal for mansards with a slope transition to vertical fascia. The Snap-On-Batten is easy to install and perform the knuckle joint detail. A concealed clip allows for unlimited thermal movement and a tapering option is available to help reach your designs maximum potential.

**MANUFACTURER DESCRIPTION**

- Fabral®, 308 Alabama Blvd, Jackson, GA 30233
- **Telephone:** 800.884.4484
- **Email:** sales@fabral.com
- **Website:** www.fabral.com

**PRODUCT DESCRIPTION**

|                            |                      |
|----------------------------|----------------------|
| <b>Acceptable Product:</b> | Fabral® Snap-On-Seam |
| <b>Wind Uplift:</b>        | ASTM E1592           |
|                            | UL580                |
| <b>Class 4 impact:</b>     | UL2218               |
| <b>Class A fire:</b>       | UL790                |

Test results vary depending on gauge and panel thickness  
Class 90, #296, 397, 397A

**DESIGN INFORMATION**

- **Roof Slope:** Minimum required - 3:12
- **Requires solid decking**
- **Field Curving:** Minimum radius 200'
- **Panel Length:** Maximum - 30' Minimum - 6'
- **Panel Width:** 12", 16", 18", 20"

**PRODUCT INSTALLATION**

Install panels plumb, level and straight so it is watertight and without waves or other distortions, allowing for thermal movement considerations. Apply sealant tape or caulking as necessary at flashing and panel joints to prevent water penetration.

**PRODUCT MAINTENANCE AND WARRANTY**

Fabral® provides a 20 year paint-finish warranty for cracking, chipping, peeling, fading and chalking, and a wide selection of weathertightness warranties are available for up to 20 years – providing confidence in a long-lasting application.

To ensure the durability of your Snap-On-Seam panels, use proper care. Remove filings, grease, stains, marks or excess sealants from roof panels system to prevent staining. Store panels and flashings in a safe, dry environment.

**FABRAL®**