
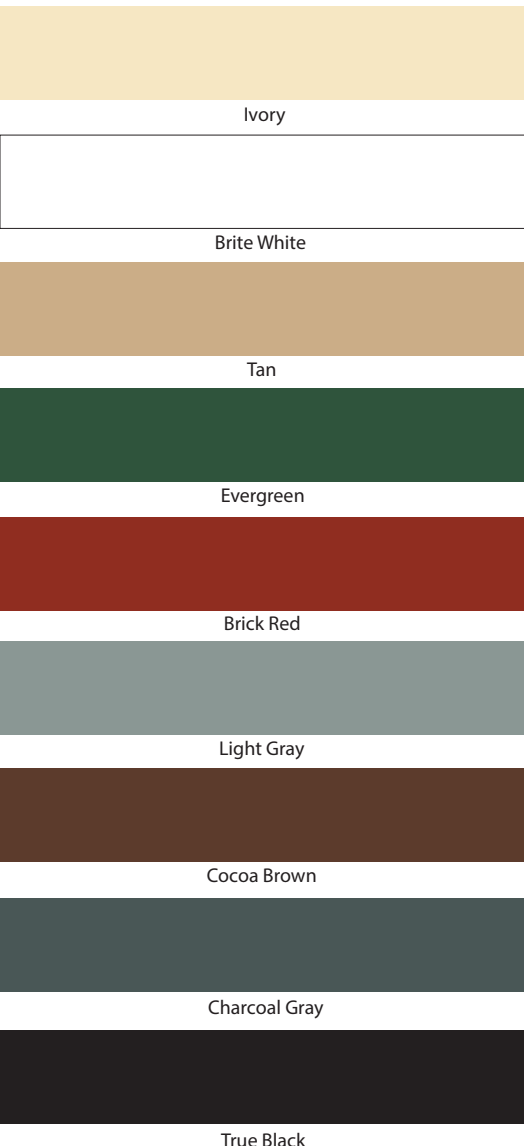


PANEL SPECS

- Minimum pitch recommended 2½:12
- 36" coverage with 1/2" rib height
- UL 790 Class A Fire Resistance Rating
- UL 2218 Class 4 Hail Impact Resistance
- High performance Enduracote paint system features an Energy Star® approved standard color offering
- Custom cut to lengths up to 40'

SUBSTRATES

- 29 gauge full hard galvanized steel
- G60 galvanized

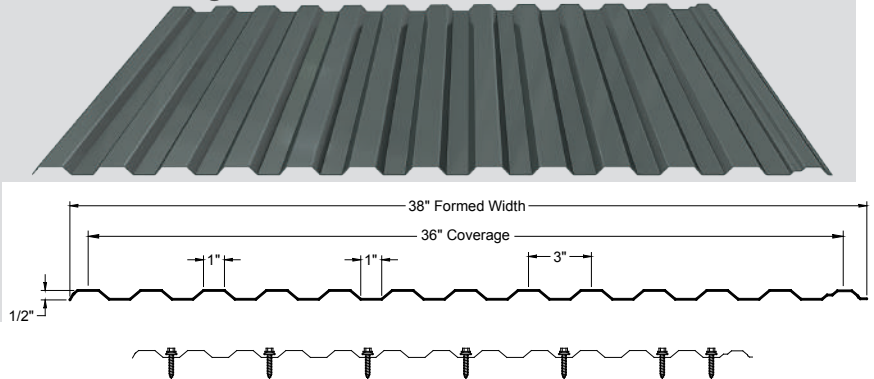

COMMON FLASHINGS

RIDGE CAP AR3	OUTSIDE CORNER/RAKE AC1	EAVE TRIM AE1
J-TRIM AJ3	DRIP CAP AD1	 ABG1
DOUBLE ANGLE AZ2	TRACK COVER 2" Track Plank AH4 (Replaces STC-503) Matches Cannonhall Trim	

Prime Rib - Load Table

Purlin or Girt Spacing (inches)	Maximum Gravity Load Positive (LB/Ft2)	Deflection at Maximum Gravity Load
24	103	.133
30	53	.166

Color samples are as close to actual as permitted by 4-color process printing.
Actual color samples are available from Fabral.
All Enduracote® colors are ENERGY STAR® approved.

To order, contact your local Fabral facility:
1820 East 26th Street
Marshfield, WI 54449
(800) 528-0878

600 15th Avenue N.E.
St. Joseph, MN 56374
(800) 873-3440